

ESPECIFICACIÓN DE PRODUCTOS



TUBOS LISOS SDR32.5-19'


SONACA 
 Productos que resisten toda una vida

Tubos PVC	1 1/2"	2"	3"	4"
Norma:	ASTM D2241	ASTM D2241	ASTM D2241	ASTM D2241
Código:	332-0150	332-0200	332-0300	332-0400
Color:	Blanco	Blanco	Blanco	Blanco
Densidad.: (kg/mm³)	.00000151	.00000142	.00000142	.00000142
Dispersión.:	6%	6%	6%	6%
Ovalidad E/S.: (mm)	1.52	1.52	1.52	2.54
Espesor pared Min.: (mm)	1.52	1.85	2.74	3.50
Espesor pared Nom.: (mm)	1.57	1.91	2.82	3.61
Espesor pared Max.: (mm)	1.61	1.96	2.90	3.71
Longitud Min.: (mm)	5800	5800	5800	5800
Longitud Max.: (mm)	5820	5820	5820	5820
Ø interno Min. Exterior: (mm)	48.11	60.17	88.70	114.07
Ø interno Nom. Exterior: (mm)	48.26	60.32	88.90	114.30
Ø interno Max. Exterior: (mm)	48.41	60.47	89.10	114.53
Peso Min.: (Kg.)	1.95	2.79	6.09	10.01
Peso Nom.: (Kg.)	2.01	2.88	6.28	10.33
Peso Max.: (Kg.)	2.07	2.97	6.47	10.64
Empaque 1:(uds. x caja.)	10	10	N/A	N/A
Presión de trabajo: (psi)	125	125	125	125
Presión de ruptura: (psi)	400	400	400	400
Longitud de campana Min.:	50.80	57.15	82.55	101.60
Longitud de campana Max.:	50.80	57.15	82.55	101.60
Ovalamiento de Camp. Max.: (mm)	0.91	0.91	1.17	1.22
Ø Interno ent. Camp. Nom.: (mm)	48.56	60.63	89.31	114.76
Ø Interno ent. Camp. Min.: (mm)	48.41	60.48	89.11	114.53
Ø Interno ent. Camp. Max.: (mm)	48.71	60.78	89.51	114.99

Grabado:

TAMAÑO DE TUBO X LONGITUD PVC 1120 (DV) SDR 32.5 (125 PSI) @ 73°F (23°C) ASTM D2241/NORDOM 855 CORVI SONACA (LOGO CORVI) MADE IN DOMINICAN REPUBLIC /FECHA/HORA/MAQUINA NO. / HILERA NO.

ESPECIFICACIÓN DE PRODUCTOS

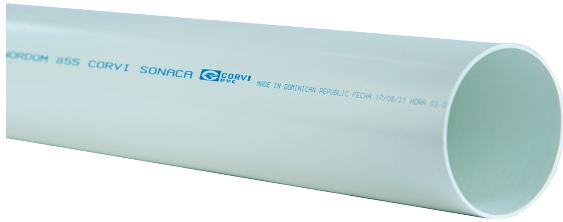

TUBOS LISOS SDR32.5-19'

SONACA 
 Productos que resisten toda una vida

Tubos PVC	6"	8"	10"	12"
Norma:	ASTM D2241	ASTM D2241	ASTM D2241	ASTM D2241
Código:	332-0600	332-0800	332-1000	332-1200
Color:	Blanco	Blanco	Blanco	Blanco
Densidad.: (kg/mm³)	.00000142	.00000142	.00000142	.00000142
Dispersión.:	6%	6%	6%	6%
Ovalidad E/S.: (mm)	2.54	3.81	3.81	3.81
Espesor pared Min.: (mm)	5.18	6.73	8.41	9.96
Espesor pared Nom.: (mm)	5.34	6.93	8.66	10.26
Espesor pared Max.: (mm)	5.49	7.13	8.91	10.56
Longitud Min.: (mm)	5800	5800	5800	5800
Longitud Max.: (mm)	5820	5820	5820	5820
Ø interno Min. Exterior: (mm)	168.00	218.69	272.67	323.47
Ø interno Nom. Exterior: (mm)	168.28	219.08	273.05	323.85
Ø interno Max. Exterior: (mm)	168.56	219.46	273.43	323.23
Peso Min.: (Kg.)	21.82	36.91	57.50	80.79
Peso Nom.: (Kg.)	22.49	38.04	59.24	83.25
Peso Max.: (Kg.)	23.16	39.17	60.98	85.70
Empaque 1:(uds. x caja.)	N/A	N/A	N/A	N/A
Presión de trabajo: (psi)	125	125	125	125
Presión de ruptura: (psi)	400	400	400	400
Longitud de campana Min.:	152.40	152.40	190.50	215.90
Longitud de campana Max.:	152.40	152.40	190.50	215.90
Ovalamiento de Camp. Max.: (mm)	2.08	3.05	3.30	3.81
Ø Interno ent. Camp. Nom.: (mm)	168.83	219.84	273.71	324.56
Ø Interno ent. Camp. Min.: (mm)	168.55	219.46	273.33	324.18
Ø Interno ent. Camp. Max.: (mm)	169.11	220.22	274.09	324.94

Grabado:

TAMAÑO DE TUBO X LONGITUD PVC 1120 (DV) SDR 32.5 (125 PSI) @ 73°F (23°C) ASTM D2241/NORDOM 855 CORVI SONACA (LOGO CORVI) MADE IN DOMINICAN REPUBLIC /FECHA/HORA/MAQUINA NO. / HILERA NO.

ESPECIFICACIÓN DE PRODUCTOS



TUBOS LISOS SDR32.5-19'

SONACA 
 Productos que resisten toda una vida

Tubos PVC	16"	18"	20"	24"
Norma:	ASTM D2241	ASTM D2241	ASTM D2241	ASTM D2241
Código:	332-1600	332-1801	332-2000	332-2400
Color:	Blanco	Blanco	Blanco	Blanco
Densidad.: (kg/mm³)	.00000142	.00000142	.00000142	.00000142
Dispersión.:	6%	6%	6%	6%
Ovalidad E/S.: (mm)	8.13	9.14	10.20	12.20
Espesor pared Min.: (mm)	12.50	14.07	15.62	18.75
Espesor pared Nom.: (mm)	12.88	14.49	16.09	19.32
Espesor pared Max.: (mm)	13.25	14.91	16.56	19.88
Longitud Min.: (mm)	5800	5800	5800	5800
Longitud Max.: (mm)	5820	5820	5820	5820
Ø interno Min. Exterior: (mm)	405.92	456.72	507.42	608.81
Ø interno Nom. Exterior: (mm)	406.40	457.20	508.00	609.60
Ø interno Max. Exterior: (mm)	406.88	457.68	508.58	610.39
Peso Min.: (Kg.)	127.24	163.06	198.76	286.26
Peso Nom.: (Kg.)	131.10	167.90	204.79	295.01
Peso Max.: (Kg.)	134.95	172.73	210.82	303.75
Empaque1:(uds. x caja.)	N/A	N/A	N/A	N/A
Presión de trabajo: (psi)	125	125	125	125
Presión de ruptura: (psi)	400	400	400	400
Longitud de campana Min.:	298.60	326	300.00	290.00
Longitud de campana Max.:	298.60	326	330.00	320.00
Ovalamiento de Camp. Max.: (mm)	4.06	4.57	5.08	6.10
Ø Interno ent. Camp. Nom.: (mm)	410.22	458.60	509.65	611.51
Ø Interno ent. Camp. Min.: (mm)	409.97	458.09	509.01	610.75
Ø Interno ent. Camp. Max.: (mm)	410.46	459.11	510.29	612.27

Grabado:

TAMAÑO DE TUBO X LONGITUD PVC 1120 (DV) SDR 32.5 (125 PSI) @ 73°F (23°C) ASTM D2241/NORDOM 855 CORVI SONACA (LOGO CORVI) MADE IN DOMINICAN REPUBLIC /FECHA/HORA/MAQUINA NO. / HILERA NO.